

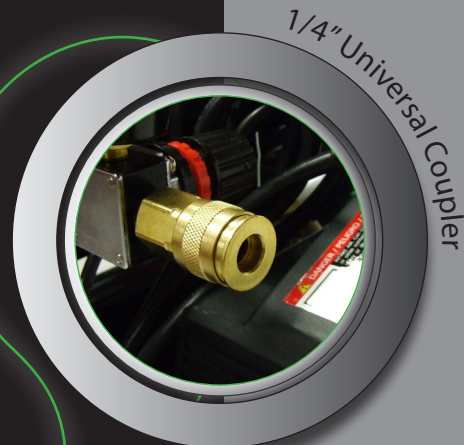


## FC2002


### 2 HP DIRECT DRIVE

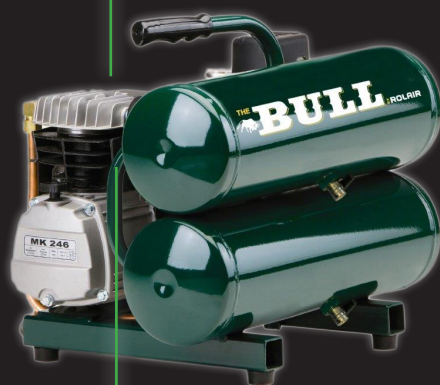

1/4" Universal Coupler

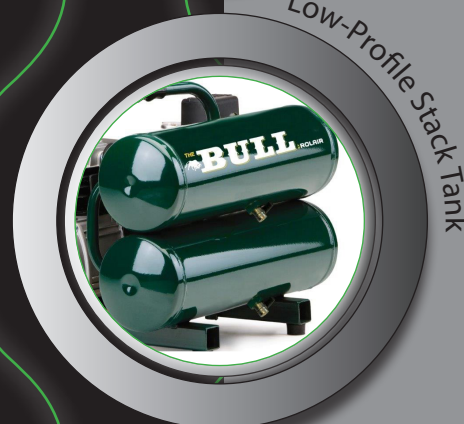

Low-Profile Stack Tank

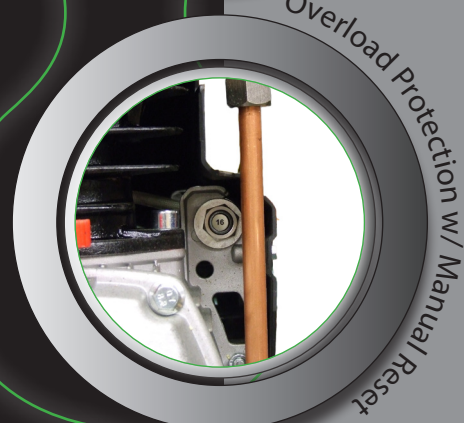

Overload Protection w/ Manual Reset

#### SPECIFICATIONS

|                         |             |
|-------------------------|-------------|
| HORSEPOWER              | 2.0 HP      |
| MOTOR RPM               | 3400        |
| CFM DELIVERED @ 40 PSI  | 5.4 CFM     |
| CFM DELIVERED @ 90 PSI  | 4.1 CFM     |
| CFM DISPLACED           | 8.7 CFM     |
| TANK CAPACITY           | 4.3 GALLONS |
| FACTORY SETTINGS        | 95-125 PSI  |
| PUMP-UP / RECOVERY TIME | 1:10 / :15  |
| SHIPPING WEIGHT         | 62 LB       |
| DIMENSIONS (LxWxH)      | 20"x15"x17" |
| NOISE LEVEL             | 79 dBA      |
| THERMAL PROTECTION      | MANUAL      |
| AMP DRAW (RUNNING)      | 14.6        |

#### EQUIPMENT

##### FEATURES


- START/STOP PRESSURE SWITCH
- AIR LINE REGULATOR AND PRESSURE GAUGE
- LOW-PROFILE STACK TANK
- TANK PRESSURE GAUGE
- SAFETY RELIEF VALVE
- INTAKE FILTER

## FC2002


### 2 HP TRANSMISIÓN DIRECTA



Acoplador universal de 6,35 MM (1/4")

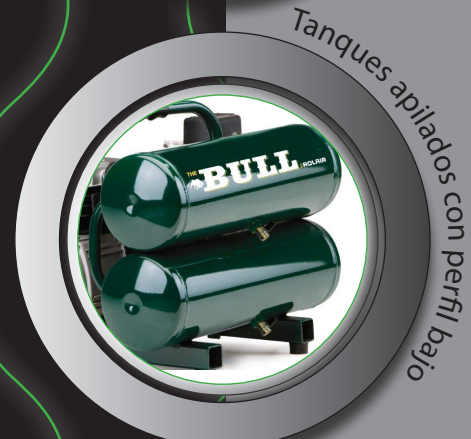

Tanques apilados con perfil bajo

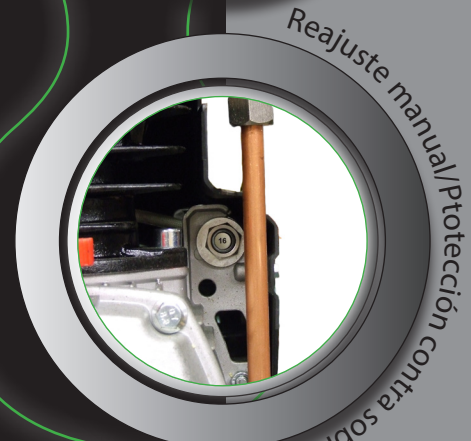

Reajuste manual/protección contra sobrecarga

#### ESPECIFICACIONES

|                                                             |                       |
|-------------------------------------------------------------|-----------------------|
| CABALLOS DE FUERZA                                          | 2.0 HP                |
| R.P.M. DEL MOTOR                                            | 3400                  |
| SALIDA DE PIES³ A 40 PSI                                    | 5.4 CFM               |
| SALIDA DE PIES³ A 90 PSI                                    | 4.1 CFM               |
| DESPLAZAMIENTO EN PIES³/MIN                                 | 8.7 CFM               |
| CAPACIDAD DEL TANQUE                                        | 16 LITERS             |
| VALORES DE FÁBRICA                                          | 95-125 PSI            |
| TIEMPO DE BOMBEO A PRESIÓN OPERATIVA/TIEMPO DE RECUPERACIÓN | 1:10 / :15            |
| PESO DE ENVÍO                                               | 28 Kg                 |
| DIMENSIONES (LARGO x ANCHO x ALTURA)                        | 51 cm x 38 cm x 43 cm |
| NIVEL DE RUIDO                                              | 79 dBA                |
| PROTECCIÓN TÉRMICA                                          | MANUAL                |
| INTENSIDAD DE CORRIENTE                                     | 14.6                  |

#### EQUIPO

##### CARACTERÍSTICAS

- INTERRUPTOR DE PRESIÓN PARA ARRANQUE/DETENCIÓN
- REGULADOR Y INDICADOR
- TANQUES APILADOS CON PERFIL BAJO
- INDICADOR DEL TANQUE
- VÁLVULA DE LIBERACIÓN DE SEGURIDAD
- FILTRO DE ENTRADA REEMPLAZABLE