


PACKED FULL OF POWER: THE SUPERCRAFT PRINCIPLE



Non-rebound work

- 1 Joint-friendly
- 2 Reduced noise
- 3 Very high impact strength
- 4 Wear resistant inserts

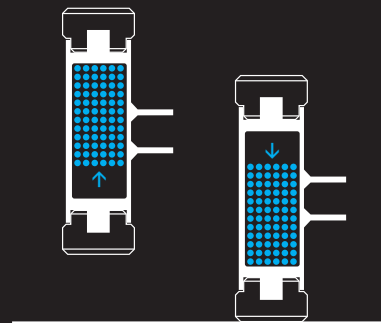

HALDER

STRIKE A BLOW WITH MANUFACTURING QUALITY

**THE
ORIGINAL
MADE IN
GERMANY.**




ERWIN HALDER KG

Erwin-Halder-Straße 5-9
88480 Achstetten-Bronnen
Germany

T +49 7392 7009-0
F +49 7392 7009-160
info@halder.com
www.halder.com

Distributed by:

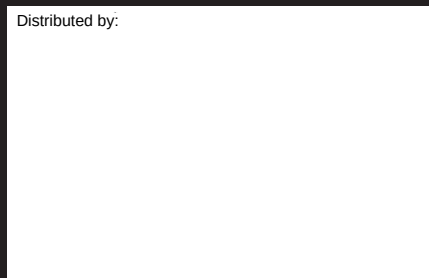

EN/12/2019


HALDER

THE ORIGINAL FOR PROFESSIONALS

Soft-face mallets and forestry tools



SIMPLY SMART: THE SIMPLEX PRINCIPLE

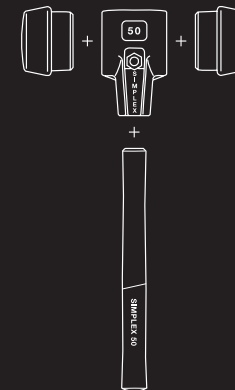

- 1 All wear parts can be easily replaced at any time
- 2 Interchangeable insert faces with different degrees of hardness
- 3 Housings of cast steel, aluminum or reinforced cast steel
- 4 High-quality wood or fibreglass handles



→ **TPE-SOFT**
soft / non-marring
hardness ● ○ ○ ○ ○



→ **RUBBER COMPOSITION**
medium hard / impact cushioning
odorless / low-wear
hardness ● ● ○ ○ ○



→ **TPE-MID**
medium hard / non-marring
hardness ● ● ○ ○ ○



→ **SUPERPLASTIC**
medium hard / very durable
wear-resistant
hardness ● ● ● ○ ○



→ **PLASTIC**
hard / oil and grease resistant
hardness ● ● ● ● ○



→ **NYLON**
hard / very wear-resistant
no chipping / oil and grease resistant
hardness ● ● ● ● ○



→ **SOFT METAL**
hard / heat-proof
hardness ● ● ● ● ●



→ **COPPER**
with plastic socket / hard
hardness ● ● ● ● ●

THE PERFECT HAMMER FOR EACH JOB



Both as a pro and as a handyman, you need two things to get excellent work results: the ambition to always do a top job, and the tools to support you in this.

For nearly 80 years, Halder soft-face mallets and forestry tools have stood for smart solutions and materials of the highest quality, made in Germany.



CONSTRUCTION / GARDENING / LANDSCAPING

→ Floor tiling, paving (sensitive material)

3113 SIMPLEX soft-face mallet · TPE-soft/TPE-mid · Ø 30-60 mm




→ Curbstone setting, paving, formwork construction

3027 SIMPLEX soft-face mallet · rubber comp./superplastic · Ø 30-80 mm



→ Curbstone setting, bracket stone setting

3027 SIMPLEX soft-face mallet · rubber comp./superplastic · Ø 80-100 mm



→ Natural stone setting masonry-/stairs setting

3013 SIMPLEX soft-face mallet · TPE-soft/TPE-mid · Ø 30-60 mm



→ Concrete formwork


3366 SUPERCRAFT sledge hammer, non-rebound · Ø 80-100 mm



MAINTENANCE / REPAIR

→ Mild to moderate work

3968 BASEPLEX soft-face mallet · cellulose acetate/nylon · Ø 25-50 mm



3026 SIMPLEX soft-face mallet · rubber comp./plastic · Ø 30-60 mm



→ Powerful work

3366 SUPERCRAFT soft-face mallet, non-rebound · Hickory handle · Ø 20-80 mm



3389 SUPERCRAFT soft-face mallet, non-rebound · 3-comp.-handle · Ø 40-60 mm



3666 MAXXCRAFT locksmith's hammer · 300-1000 g



→ Automotive and truck sector

3029 SIMPLEX soft-face mallet · rubber comp./soft metal · Ø 30-80 mm



3749 SIMPLEX soft-face mallet · copper/soft metal · Ø 30-40 mm



3389 SUPERCRAFT soft-face mallet, non-rebound · 3-comp.-handle · Ø 40-60 mm



3408 Punch · Ø 10-15 mm



→ Changing stucked tires

3379 BLACKCRAFT soft-face mallet, non-rebound · Ø 40-60 mm



JOINERY / CARPENTRY

→ Setting light/sensitive workpieces, veneering, furniture assembly

3117 SIMPLEX soft-face mallet · TPE-soft/superplastic · 50:40 · Ø 50 mm



→ Window and door construction

3380 SECURAL soft-face mallet, non-rebound · 30x40 mm




→ Pin driving

3666 MAXXCRAFT locksmith's hammer · 300-1000 g



→ Roof setting

3366 SUPERCRAFT sledge hammer, non-rebound · Ø 80-100 mm



INTERIOR WORK

→ Parquet and laminate flooring

3380 SECURAL soft-face mallet, non-rebound · 30x40 mm



3666 MAXXCRAFT locksmith's hammer · 300-1000 g



→ Floor tiling

3113 SIMPLEX soft-face mallet · TPE-soft/TPE-mid · Ø 30-60 mm



→ Drywall construction

3013 SIMPLEX soft-face mallet · TPE-soft/TPE-mid · Ø 30-60 mm



→ Install ceiling moldings

3408 Drop-mallet, non-rebound · Ø 20-50 mm



SHEET METAL FORMING

→ Folding and bending work

3366 SUPERCRAFT soft-face mallet, non-rebound · Hickory handle · Ø 20-80 mm



3380 SECURAL soft-face mallet, non-rebound · 30x40 mm



3968 BASEPLEX soft-face mallet · cellulose acetate/nylon · Ø 25-50 mm



→ Installation work

3380 SECURAL soft-face mallet, non-rebound · 30x40 mm



3906 BASEPLEX soft-face mallet · cellulose acetate · Ø 25-50 mm



3677 FERROPLEX combi hammer · Ø 30-35 mm



METALWORKING INDUSTRY

→ Positioning and adjusting of workpieces

3366 SUPERCRAFT soft-face mallet, non-rebound · Hickory handle · Ø 20-80 mm



3377 SUPERCRAFT soft-face mallet, non-rebound · Steel tube handle · Ø 25-70 mm



3380 SECURAL soft-face mallet, non-rebound · 30x40 mm



3028 SIMPLEX soft-face mallet · nylon/rubber comp. · Ø 30-80 mm



3408 Drop-mallet, non-rebound · Ø 20-50 mm



→ Straightening work, plant construction

3748 SIMPLEX soft-face mallet · copper/nylon · Ø 30-40 mm



3666 MAXXCRAFT locksmith's hammer · 300-1000 g



→ Housing assembly, mould construction

3089 SIMPLEX soft-face mallet · nylon/soft metal · Ø 30-80 mm



AGRICULTURE / FORESTRY

→ Fence construction

3007 SIMPLEX sledge hammer · superplastic · Ø 80-140 mm



3366 SUPERCRAFT sledge hammer, non-rebound · Ø 80-100 mm



→ Splitting 1-metre logs, wedge work

3007 SIMPLEX splitting maul · 4.100 g



→ Splitting of coniferous wood, wedge work

3007 SIMPLEX splitting axe · 2.700 g



→ Splitting of hardwood, wedge work

3007 SIMPLEX splitting axe with wedge bars · 2.840 g



→ Splitting 1-metre logs

3556 Halder twisted splitting wedge



→ Splitting of smaller logs/kindling

3555 Halder hand axe · forged



Further models and combinations, see www.halder.com