




| Brand | Root             |
|-------|------------------|
|       | <b>FHNC5Z...</b> |

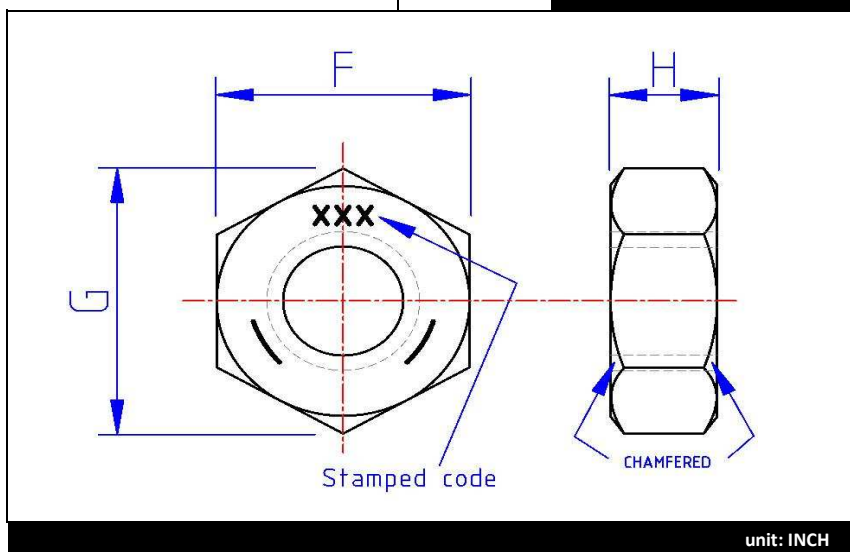

| THREAD<br>SIZE<br>Class 2B |     | <b>F</b><br>ACROSS FLAT | <b>G</b><br>ACROSS CORNER | <b>H</b><br>THICKNESS | THREAD<br>PER INCH |
|----------------------------|-----|-------------------------|---------------------------|-----------------------|--------------------|
| <b>1/4</b>                 | Min | 0.428                   | 0.488                     | 0.212                 | 20                 |
|                            | Max | 0.438                   | 0.505                     | 0.226                 |                    |
| <b>5/16</b>                | Min | 0.489                   | 0.557                     | 0.258                 | 18                 |
|                            | Max | 0.500                   | 0.577                     | 0.273                 |                    |
| <b>3/8</b>                 | Min | 0.551                   | 0.628                     | 0.320                 | 16                 |
|                            | Max | 0.563                   | 0.650                     | 0.337                 |                    |
| <b>7/16</b>                | Min | 0.675                   | 0.768                     | 0.365                 | 14                 |
|                            | Max | 0.688                   | 0.794                     | 0.385                 |                    |
| <b>1/2</b>                 | Min | 0.736                   | 0.840                     | 0.427                 | 13                 |
|                            | Max | 0.750                   | 0.866                     | 0.448                 |                    |
| <b>9/16</b>                | Min | 0.861                   | 0.982                     | 0.473                 | 12                 |
|                            | Max | 0.875                   | 1.010                     | 0.496                 |                    |
| <b>5/8</b>                 | Min | 0.922                   | 1.051                     | 0.535                 | 11                 |
|                            | Max | 0.938                   | 1.083                     | 0.559                 |                    |
| <b>3/4</b>                 | Min | 1.088                   | 1.240                     | 0.617                 | 10                 |
|                            | Max | 1.125                   | 1.299                     | 0.665                 |                    |
| <b>7/8</b>                 | Min | 1.269                   | 1.447                     | 0.724                 | 9                  |
|                            | Max | 1.312                   | 1.516                     | 0.776                 |                    |
| <b>1</b>                   | Min | 1.450                   | 1.653                     | 0.831                 | 8                  |
|                            | Max | 1.500                   | 1.732                     | 0.887                 |                    |

### Hex Nut, Coarse Thread, GRADE '5', Zinc

Root = Finished Hex Nut Coarse gr-5 Zinc

#### Bulk Label Description:

English: FINISHED HEX NUT, GR-5, ZINC  
 French: ÉCROU HEXAGONAL, GR-5, ZINC  
 Spanish: TUERCA HEXAGONAL, GRADO 5, ZINC

Date : 21 janvier 2019

Done by : P.B.