


Brand	Root
	HLHDG...

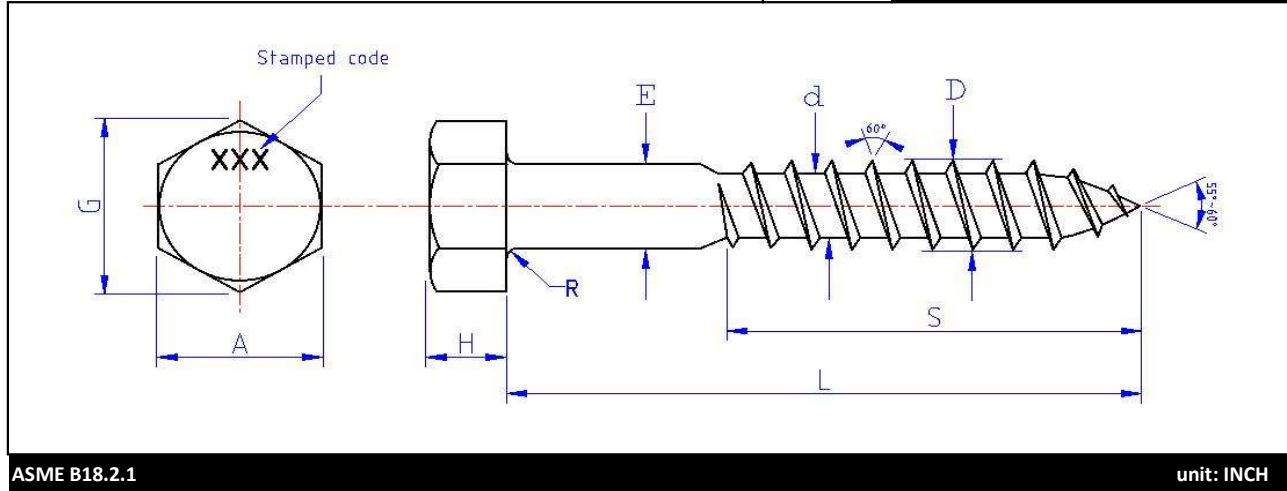

L LENGTH TOLERANCE	size	1/4 thru 1/2	5/8 and more
	≤ 6"	± 0.12	± 0.25
	> 6"	± 0.25	± 0.25

S MIN. THREAD LENGTH	(1/2 x L) + 0.5" or 6" Whichever shorter. If screw too small then full thread
-----------------------------------	---

SCREW SIZE		A ACROS FLAT	G ACROSS CORNERS	H HEAD HEIGHT	E BODY DIAM.	d MINOR Thread DIAM.	D MAJOR Thread DIAM.	R RADIUS OF FILLET	THREAD PER INCH
1/4	Min	0.425	0.484	0.150	0.237	0.160	0.237	0.010	10
	Max	0.438	0.505	0.188	0.260	0.177	0.260	0.030	
5/16	Min	0.484	0.552	0.195	0.298	0.210	0.298	0.010	9
	Max	0.500	0.577	0.235	0.324	0.228	0.324	0.030	
3/8	Min	0.544	0.620	0.226	0.360	0.250	0.360	0.010	7
	Max	0.562	0.650	0.268	0.388	0.268	0.388	0.030	
1/2	Min	0.725	0.826	0.302	0.482	0.354	0.482	0.010	6
	Max	0.750	0.866	0.364	0.515	0.374	0.515	0.030	
5/8	Min	0.906	1.033	0.378	0.605	0.453	0.605	0.020	5
	Max	0.938	1.083	0.444	0.642	0.473	0.642	0.060	
3/4	Min	1.088	1.240	0.455	0.729	0.562	0.729	0.020	4-1/2
	Max	1.125	1.299	0.524	0.768	0.582	0.768	0.060	

HEX. LAG SCREW, HOT-DIP GALVANIZED
Screw shall be made of Low carbon steel **ASTM A307 - Grade A**

Root= Hex. Lag Hot Dip Galvanised

Bulk Label Description:

English: HEX LAG SCREW, HOT-DIP GALVANIZED
French: TIRE FOND, TÊTE HEX, GALVANISÉ À CHAUD
Spanish: TIRAFONDO, CABEZA HEXAGONAL, GALVANIZADO EN CALIENTE

Date: 7 mars 2019

Done by: **P.B.**