




Brand	Root
	RSZ...

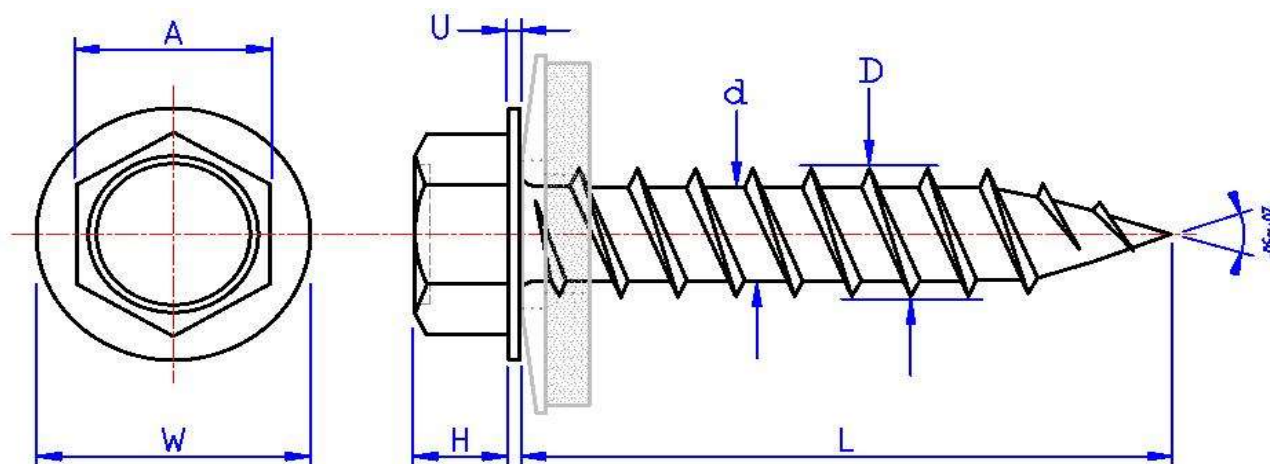

unit: INCH

L LENGTH TOLERANCE	$\leq 1"$	± 0.03
	$> 1"$	± 0.05

FULL THREAD

SCREW SIZE		W WASHER DIAM.	U WASHER THICKNESS	A ACROSS FLAT	H HEAD HEIGHT	d MINOR DIAM.	D MAJOR DIAM.	THREAD PER INCH	Min. Torsional Strength Lb/Inch
# 9	Min	0.322	0.019	0.244	0.139	0.121	0.175	15	48
	Max	0.348	0.031	0.250	0.155	0.128	0.181		
# 10	Min	0.384	0.019	0.305	0.139	0.126	0.188	12	48
	Max	0.414	0.031	0.312	0.155	0.133	0.194		
# 14	Min	0.480	0.030	0.367	0.172	0.178	0.248	10	125
	Max	0.520	0.050	0.375	0.190	0.185	0.254		

Indented Hex Washer Head assembled with Dish Bonded Washer (see page 2)
Twinfast Single Lead, Sharp Point, DACROTIZED (1000 Hrs. SST)

Root= Roofing Screw Zinc

Bulk Label Description:


English: ROOFING SCREW HEX HEAD WITH STEEL & NEOPRENE WASHER, DACROTIZED

French: VIS À TOITURE TÊTE HEX AVEC RONDELLE D'ACIER & NÉOPRÈNE, DACROTIZE

Spanish:

Date : January 22, 2021

Done by : *P.B.*

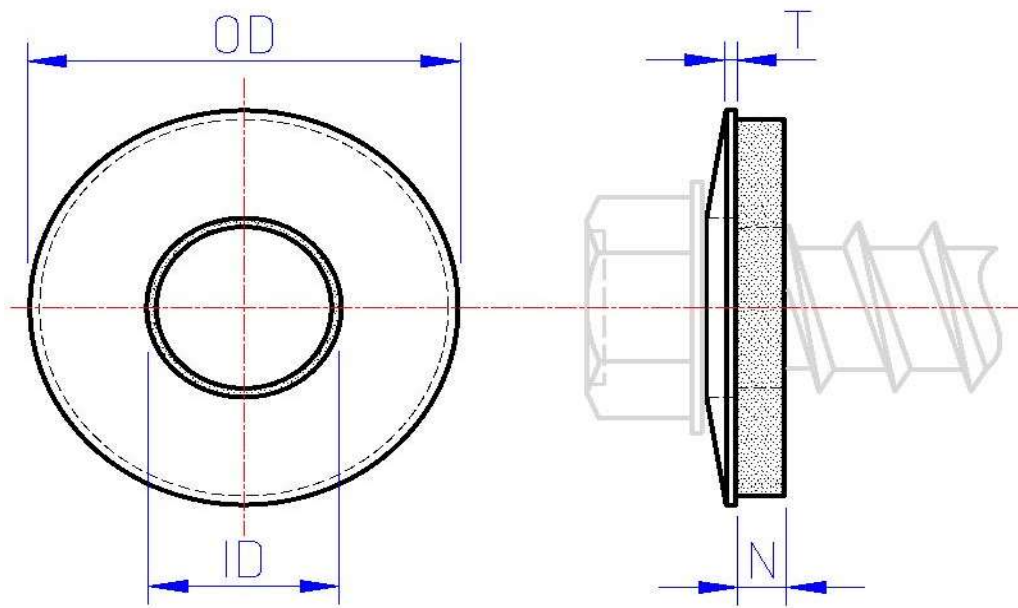

unit: INCH

SCREW SIZE		ID INSIDE DIAM.	OD OUTSIDE DIAM.	T WASHER THICKNESS	N NEOPREN THICKNESS
# 9	Min	0.200	0.470	0.025	0.058
	Max	0.210	0.490	0.035	0.075
# 10	Min	0.200	0.470	0.025	0.058
	Max	0.210	0.490	0.035	0.075
# 14	Min	0.275	0.630	0.025	0.058
	Max	0.285	0.650	0.035	0.075

DISH BONDED WASHER (EPDM), DACROTIZED (1000 Hrs. SST)

ID is for steel plate only and does not concern the EPDM Washer

 Date: January 22, 2021

 Done by: P.B.