




Brand	Root
	SLHDG...

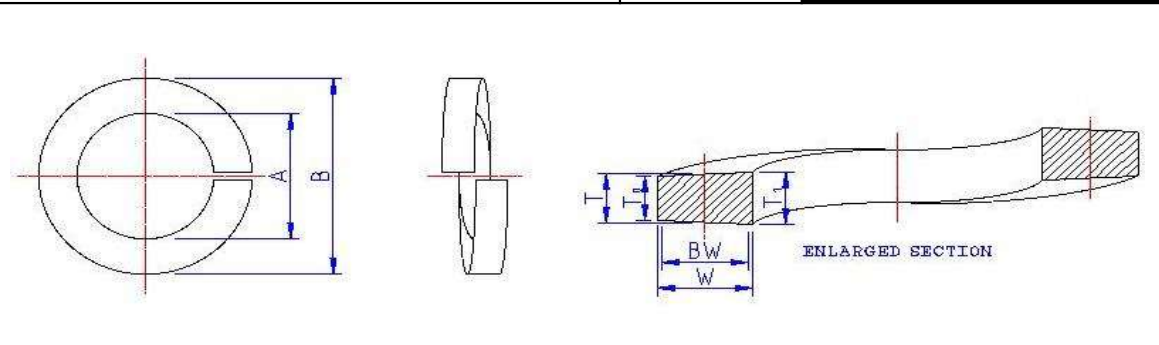

ASME B18.21.1

unit: INCH

Bolt Size		A Inside Dia.	B Outside Diam.	T THICKNESS ($T_1 + T_0$)/2	W Width	BW Bearing Width
1/4	Min	0.252		0.062	0.109	0.076
	Max	0.260	0.487			
5/16	Min	0.314		0.078	0.125	0.087
	Max	0.322	0.583			
3/8	Min	0.377		0.094	0.141	0.099
	Max	0.385	0.680			
7/16	Min	0.440		0.109	0.156	0.109
	Max	0.450	0.776			
1/2	Min	0.502		0.125	0.171	0.120
	Max	0.512	0.869			
9/16	Min	0.564		0.141	0.188	0.132
	Max	0.574	0.965			
5/8	Min	0.628		0.156	0.203	0.142
	Max	0.641	1.073			
3/4	Min	0.753		0.188	0.234	0.164
	Max	0.766	1.265			
7/8	Min	0.878		0.219	0.266	0.186
	Max	0.894	1.459			
1	Min	1.003		0.250	0.297	0.208
	Max	1.024	1.656			

Regular Helical Spring-Lock Washers, Hot-Dip Galvanised

Root= Spring Lock Hot Dip Galvanised

Bulk Label Description:

English: SPRING LOCK WASHER, HOT-DIP GALVANIZED

French: RONDELLE DE BLOCAGE À RESSORT, GALVANISÉ À CHAUD

Spanish: ARANDELA DE SEGURIDAD CON RESORTE, GALVANIZADO EN CALIENTE

Date : 11 septembre 2019

Done by : **P.B.**