



UNIVERSAL PRIMER-FREE MEMBRANE

Air Barrier/Vapor Retarder/Thru-Wall Flashing

NEW!
INSTALL DOWN TO
-20°F (-28°C)
WITHOUT THE NEED
FOR A PRIMER



Below Grade on ICF

**10 Year Limited
Warranty**

- Universal Primer-Free Membrane is a high performance self-adhering membrane with Super Stick Technology™ adhesive that can be used in a variety of building envelope applications including:
 - Full wall air & vapor barrier
 - Thru wall flashing
 - Below grade waterproofing
 - Retaining wall waterproofing
 - ICF
 - Behind metal wall panels
 - Behind cultured stone & brick veneer
- Class A Fire rating
- IAPMO ER #362
- Install down to -20°F – all temp, all weather
- Lightweight roll – 16# for 36" x 50'
- Can be installed on damp surfaces
- 180 day UV exposure
- No cold weather storage temperature requirements
- Excellent chemical compatibility
- Rated to 300°F
- No asphalt, VOC's, HFCC's or CFC's
- Meets or exceeds AMMA 711-13 requirements
- Seals around properly installed nails and staples



Saves time and money by eliminating the need for priming



UNIVERSAL PRIMER-FREE MEMBRANE

Air Barrier/Vapor Retarder/Thru-Wall Flashing

AVAILABLE SIZES


4", 6", 9", 12", 18", 24", 36" x 50'



Universal Primer-Free Membrane being used as a below grade waterproofing on ICF (no primer needed)



Contractor installed Universal Primer-Free Membrane as Below Grade Waterproofing on a poured foundation

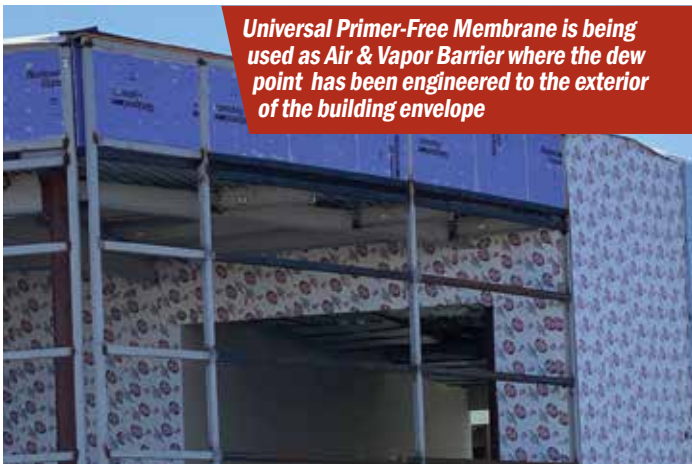

Universal Primer-Free Membrane is being used as Air & Vapor Barrier where the dew point has been engineered to the exterior of the building envelope



Installed as a snow band to protect the sheathing and carried down onto the foundation to completely seal the sill plate to keep out air, moisture rodents and insects

NOTE: For the most current information, refer to the Protecto Wrap website at www.protectowrap.com.



Protecto Wrap Company
1955 S. Cherokee Street • Denver, CO 80223
(800) 759-9727 • www.ProtectoWrap.com



UPFM-200 (8-21)