


Brand	Root
	FKWB...

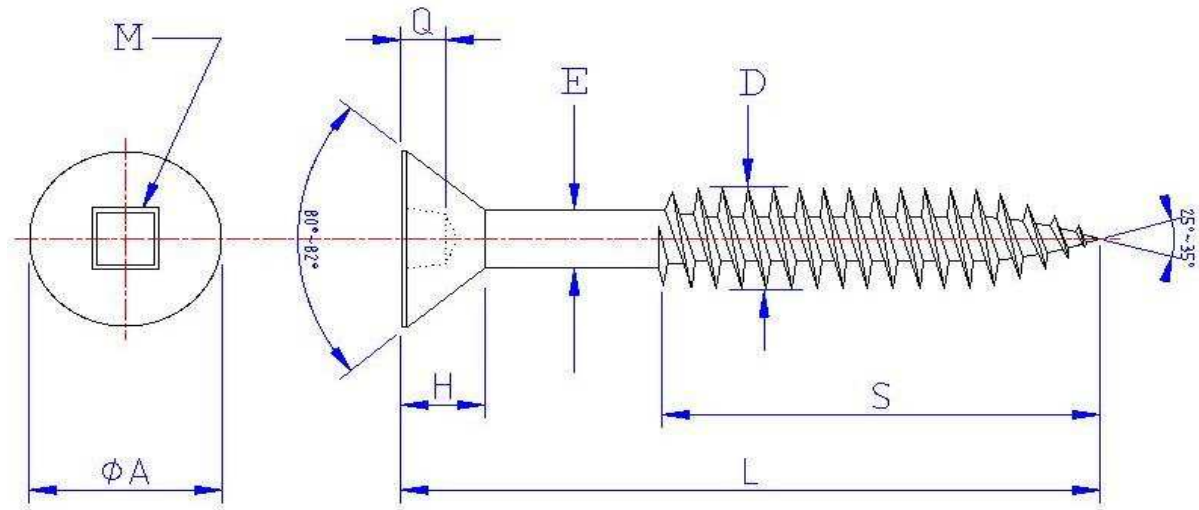

unit: INCH

L LENGTH TOLERANCE	≤ 5/8"	+ 0	- 0.03
	> 5/8" to ≤ 1-1/2"	+ 0	- 0.05
	> 1-1/2" to ≤ 2-3/4"	+ 0	- 0.06
	> 2-3/4"	+ 0	- 0.09

S THREAD LENGTH	< 1"	Full Thread
	≥ 1"	2/3 Thread

SCREW SIZE	M PUNCH		Q DRIVE DEPTH	A HEAD DIAM.	H HEAD HEIGHT	E BODY DIAM.	D THREAD DIAM.	THREAD PER INCH	TORK INCH/ POUND
# 4	# 0	Min	0.028	0.195	Ref.	0.084	0.105	22	12
		Max	0.038	0.225	0.067	0.095	0.116		
# 5	# 1	Min	0.050	0.220	Ref.	0.096	0.118	20	18
		Max	0.065	0.252	0.075	0.107	0.129		
# 6	# 1	Min	0.050	0.244	Ref.	0.107	0.131	18	24
		Max	0.065	0.279	0.083	0.118	0.142		

Flat Head Countersunk, Square recess, Wood Screw, **TWINFAST** Double Lead Thread, Brass Plated

Root= Flat socket Wood Brass

Bulk Label Description:

English: FLAT HEAD, SQUARE DRIVE, WOOD SCREW, BRASS PLATED

French: VIS À BOIS, TÊTE PLATE, CARRÉ, PLAQUÉ LAITON

Spanish: TORNILLO PARA MADERA, CABEZA PLANA, CUADRADO, CHAPADO EN LATÓN

Date : 7 février 2019

Done by : P.B.